

# ► PACK-540DW

12V-32V Digital Wireless Monitor System  
4-Channel, Single / Split / Quad View




Congratulations on  
purchasing our backup Camera System!



*We recommend doing a benchmark test before installation to ensure that all components are working properly.*



IN NO EVENT SHALL SELLER OR MANUFACTURER BE LIABLE FOR ANY DIRECT OR CONSEQUENTIAL DAMAGES OF ANY NATURE, OR LOSSES OR EXPENSES RESULTING FROM ANY DEFECTIVE PRODUCT OR THE USE OF ANY PRODUCT.

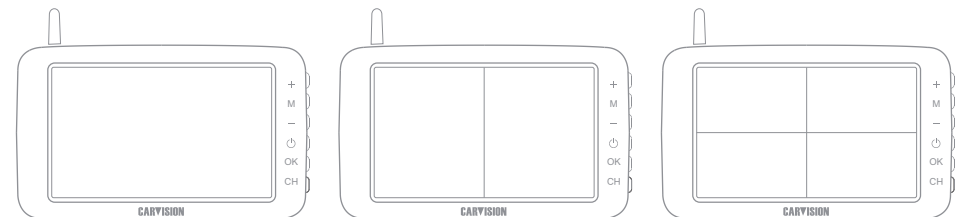

**CARVISION®**

**CARVISION®**

# TECHNICAL SPECIFICATION



## Monitor

Display Size	5" Digital LCD Panel
Technology	2.4GHz Digital Wireless
Transmission Distance	>30 meter, open field >100 meter
Frequency	2400-2483.5 Mhz
Latency	100ms
Camera	Up to 4 cameras
Resolution	800 x 3(RGB) x 480
Backlight Brightness	300cd/m
Contrast Ratio	500:1
Screen Mode	16:9
Viewing Angle	U: 50° / D: 50° / L/R 70°
Video Source	1Vp-p, 75Ohm, 30f/s
Audio	No
Power Input	DC 12-32V
Power Consumption	About 2.5W, 210mA
Operating Temperature	-20°C to approx. 70°C
Storage Temperature	-30°C to approx. 80°C


## Camera

Resolution	1080P
View angle	125°H, 75°V
Technology	2.4GHz Digital Wireless
Transmission Distance	>30 meter, open field >100 meter
Frequency	2400-2483.5MHz
Infrared distance	10 meter
Illumination	0.1 Lux (IR on)
S/N Ratio	more than 48dB
Waterproof	IP69K
Power input	DC 12-32V
Power Consumption	120mA
Operating Temperature	-20°C to approx. 70°C
Storage Temperature	-30°C to approx. 80°C

# PARKING LINE SETTINGS

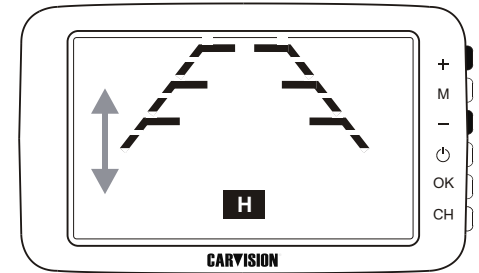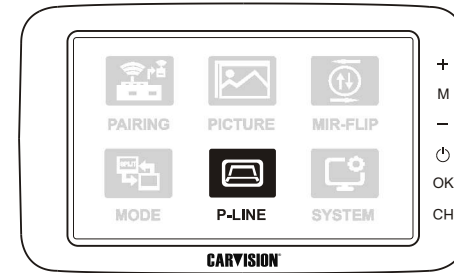

- 1) Press " M " (MENU)
- 2) Press " + / - " to select the P-LINE icon
- 3) Press " OK "
- 4) Press " + / - " to select **ON OFF**
- 5) Press " OK " to confirm

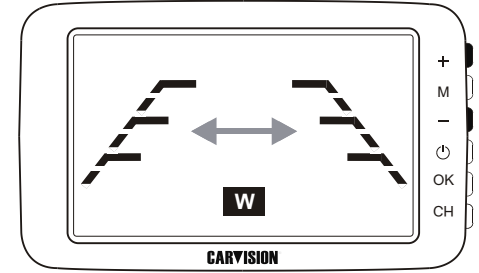


Keep pressing " - " **H** / **W** / **M** / OFF

**H** (Height), Press " + " UP - Down

**W** (Wide), Press " + " Wide - Narrow

**M** (Move), Press " + " Left - Right

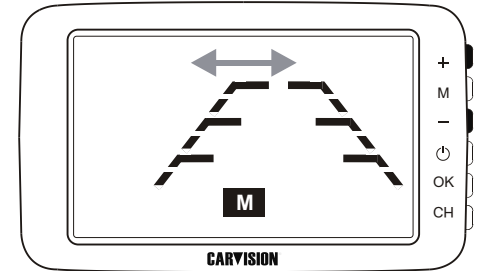


# SYSTEM LANGUAGE



- 1) Press " M " (MENU)
- 2) Press " + / - " to select the SYSTEM icon
- 3) Press " OK " [RED]
- 4) Press " + / - " to select **ENGLISH / FRANCAIS / ESPANOL / DEUTSCH**
- 5) Press " OK " to confirm [YELLOW]

# MONITOR OPERATION

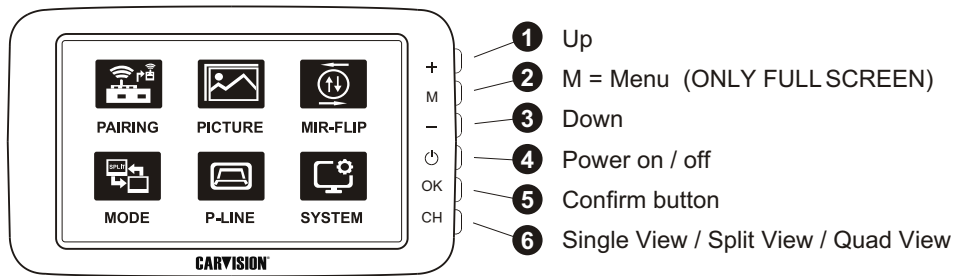

# CAMERA PAIRING

The camera and monitor from the set are already paired and will be shown as soon as both are powered and the monitor is turned ON.


## PAIRING camera 2

Press "CH" to select the unused channel in full screen.

Pairing won't work on an existing paired channel or in the split mode !




- 1) Press " M " (MENU)
- 2) Press " + / - " to select the pairing icon
- 3) Press OK

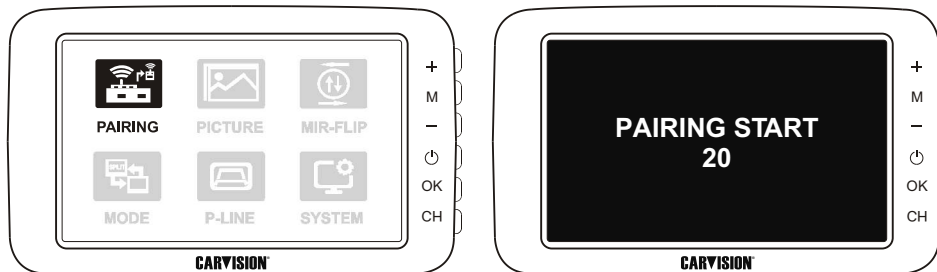


Make sure, that the additional camera is powered while pairing !

When the pairing fails, press the "PAIR" button on the back side of the camera for > 3 seconds during the 20 second countdown.  
(Or re-connected the camera power during the 20 second countdown)



# MONITOR MODE

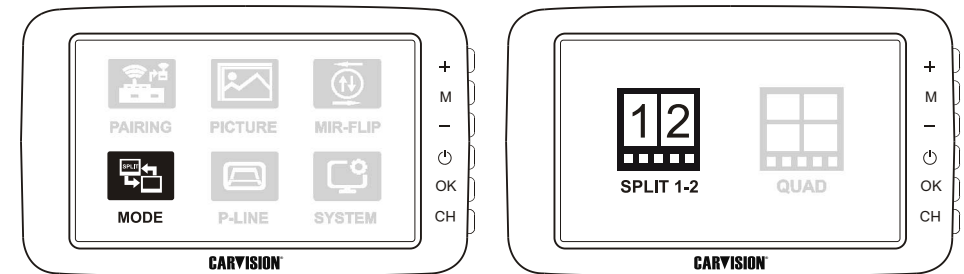

- 1) Press " M " (MENU)
- 2) Press " + / - " to select the MODE icon
- 3) Press " OK "
- 4) Press " + / - " to select the QUAD icon
- 5) Press " OK " to confirm


## PAIRING camera 3 / 4





Press " CH " to select the unused channel in full screen.

Pairing won't work on an existing paired channel or in the quad mode !

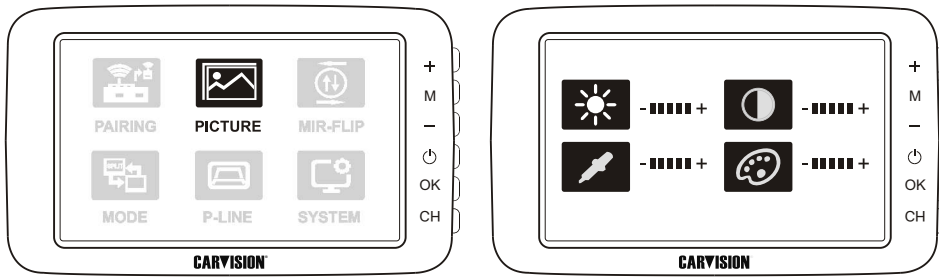






# PICTURE IMAGE SETTINGS

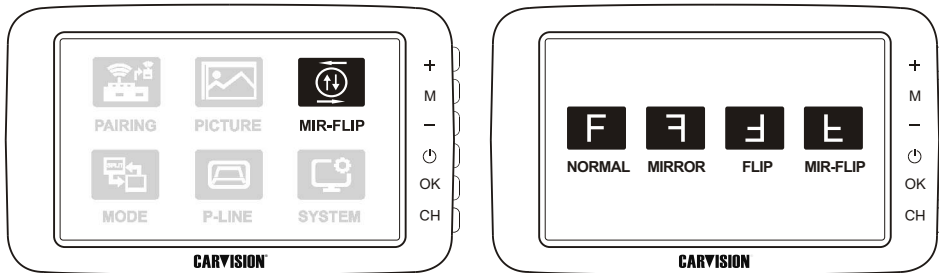


- 1) Press " M " (MENU)
- 2) Press " + / - " to select the PICTURE icon
- 3) Press " OK "
- 4) Press " + / - " to select BRIGHTNESS , CONTRAST , TINT , COLOR 
- 5) Press " OK " [RED]
- 6) Press " + / - " to change to setting value -■■■■■+
- 7) Press " OK " to confirm [YELLOW]

# PICTURE MIRROR-FLIP SETTINGS



- 1) Press " M " (MENU)
- 2) Press " + / - " to select the MIR-FLIP icon
- 3) Press " OK "
- 4) Press " + / - " to select NORMAL , MIRROR , FLIP , MIR-FLIP 
- 5) Press " OK " to confirm

# PACKAGE CONTENT

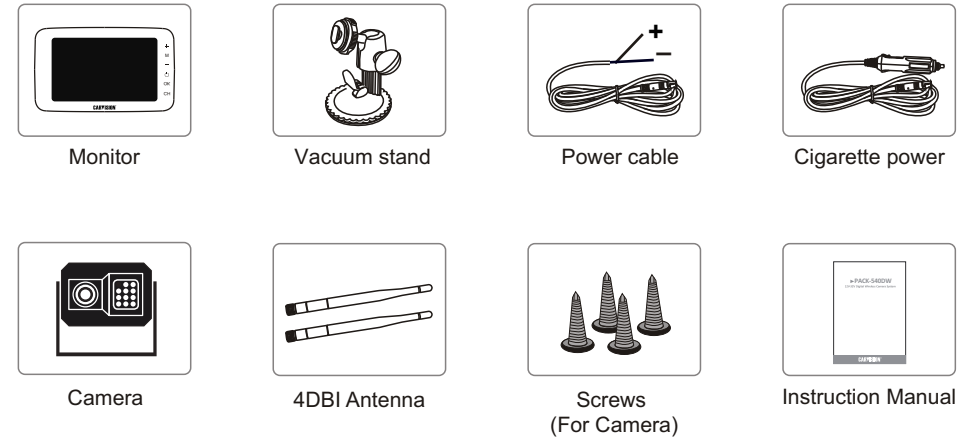

# CONNECTING POWER

The camera and monitor from the set are already paired and will be shown as soon as both are powered and the monitor is turned ON.

