FORD SYNC-3

Camera / Video interface


Compatible with 6.5" / 7" / 8" systems with and without NAVI

SYNC 2.5 & SYNC 3




Article code: 300 208

Installation diagram:

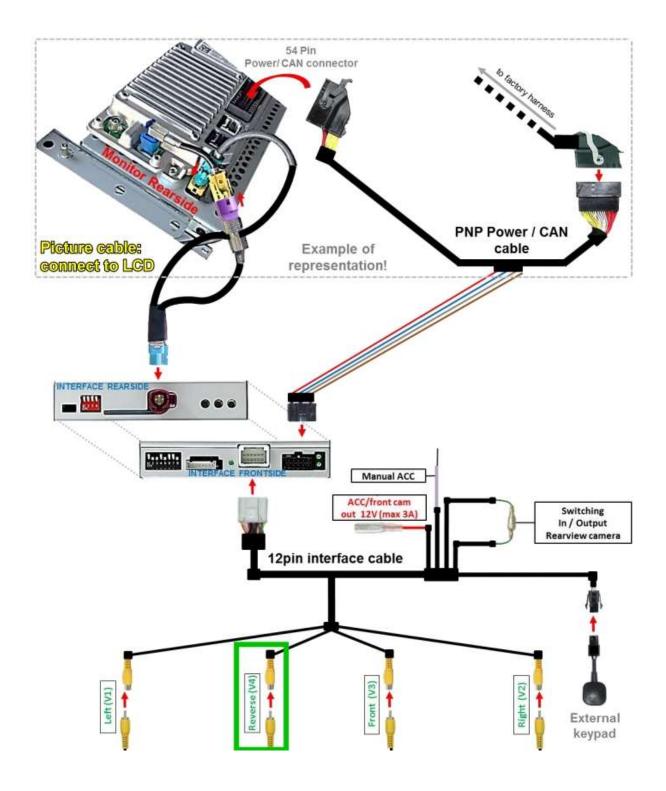

Tablet LCD:

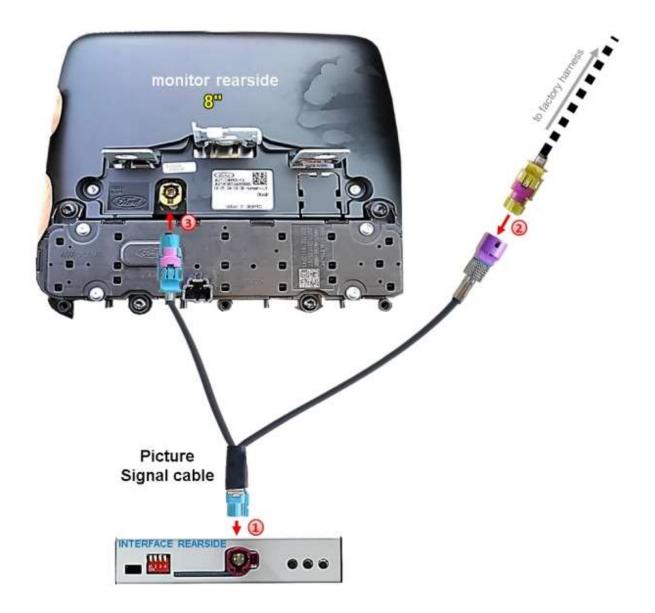


After installing the interface in between and power is on, the OEM image should be shown on screen.


Switching from OEM image to external sources:

- V1/V2/V3: use the switch key to switch from OEM image to V1-V2-V3.
- Rear CAM: when put gear in Reverse the interface switches automatically to Reverse camera input, usually detected by CANbus*.
- *Unfortunately sometimes reverse it's not reacting by CANbus because the car can have different CAN protocol/codes. Also the guide lines can not be guaranteed.


In this case the **green Reverse-in** trigger wire of the interface should be connected to the analog 12V reverse licht signal of the car.



DIP-8 picture setting:

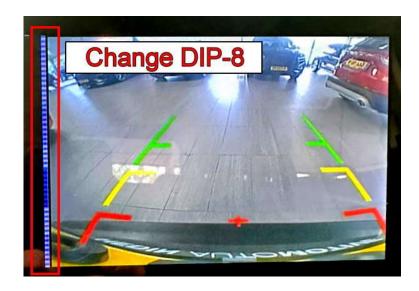

MENU / picture settings:




The picture settings are adjusted by the 3 buttons on the video-interface. Press the MENU button to open the OSD settings menu. To switch to the next menu item, pressing UP and DOWN will change the selected value. The buttons are embedded in the housing to avoid accidental changes during or after installation. The picture settings have to be done separately for AV1, AV2 and CAM while the corresponding input is selected and visible on the monitor.

Note: The OSD menu is only shown when a working video source is connected to the selected video-input of the interface.

The following settings are available

Contrast
Brightness
Saturation
Position H (horizontal) out of function
Position V (vertical) out of function
IR-AV1 out of function
IR-AV2 out of function
Guide-lines left out of function
Guide-lines right out of function
Guide lines CNTRL out of function (Dip switch 7 for guide lines)



Head unit place in Ford Transit Custom:



